



High Voltage Molds



nVent ERICO Cadweld high-voltage copper connections give you all the advantages you have come to expect from exothermic connections. nVent ERICO Cadweld connections have the current-carrying capacity equal to the conductors they connect and will never loosen or corrode. The nVent ERICO Cadweld high-voltage welding set-up uses a unique ceramic fiber smoke filter system which prevents sparks and produces minimal smoke, but also reduces dust and other emissions to an acceptable level for exposures, even if used in unventilated small rooms and cable tunnels.

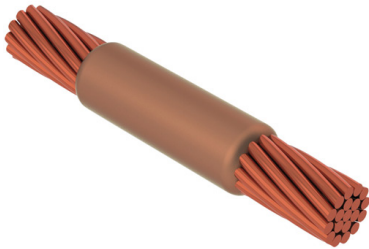

Cable to Cable, High Voltage

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2021 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.